

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES


Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):


- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

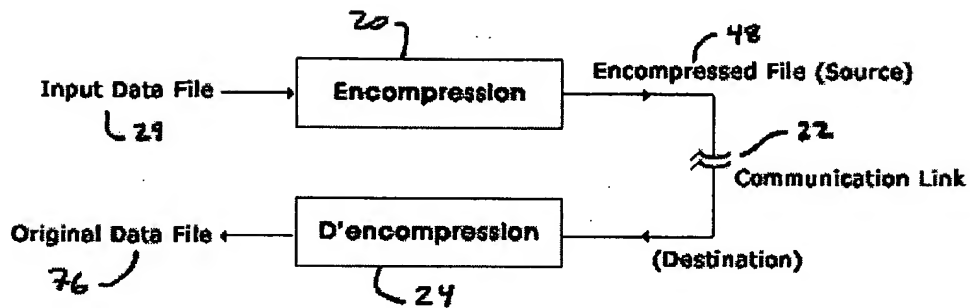

(a) Encompression and D'encompression of Digital Data File

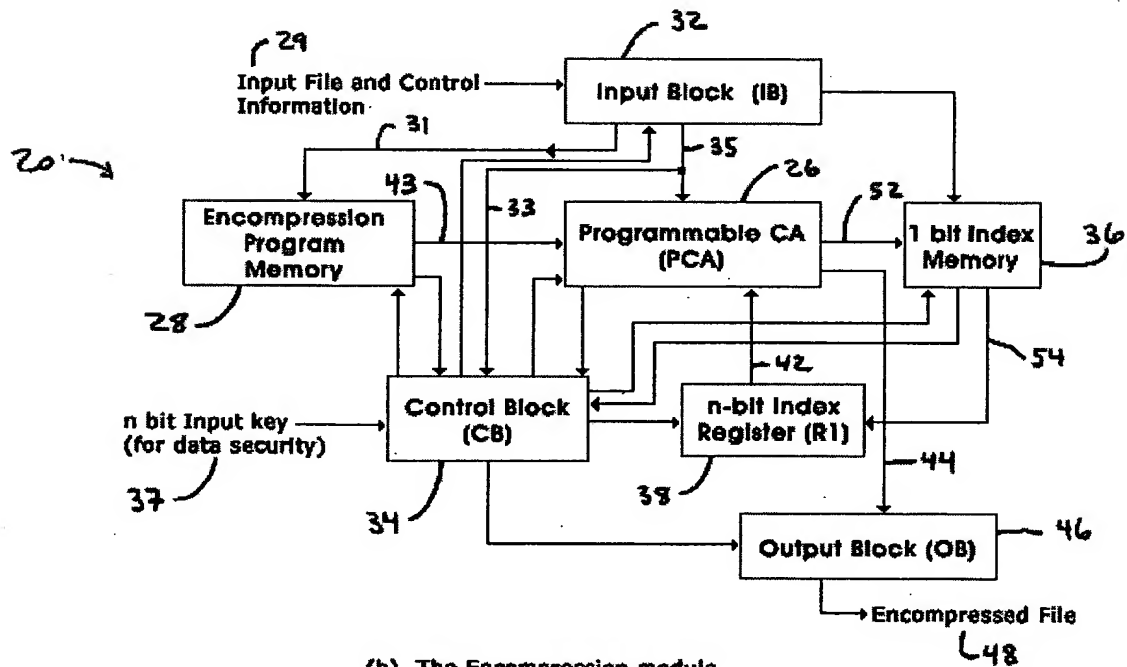

(b) The Encompression module

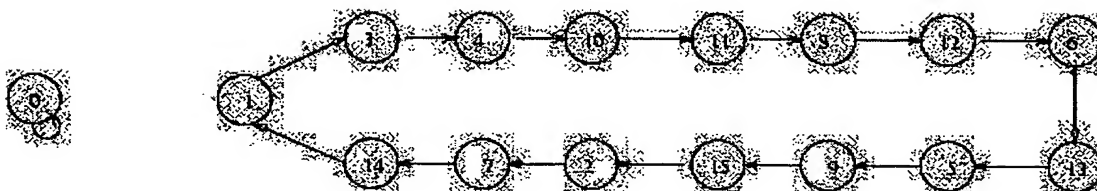


Fig. 2. State transition diagram of a maximum length group CA



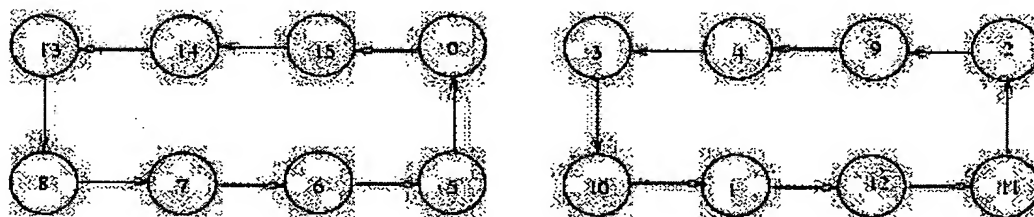


Fig. 3. State transition diagram of a non-maximum length group CA

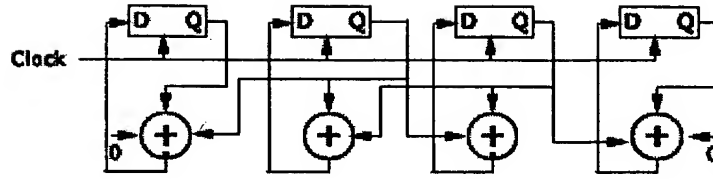

(a) Structure

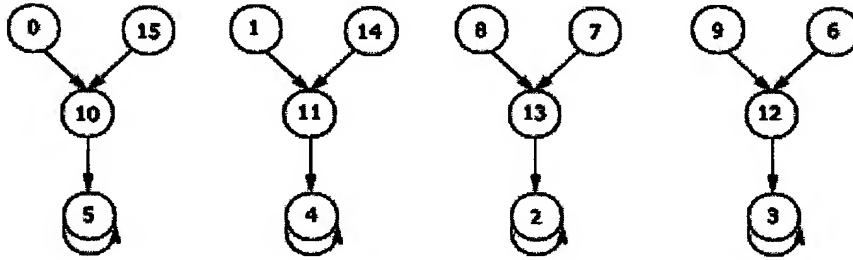

Zero-tree

$$T = \begin{bmatrix} 1 & 1 & 0 & 0 \\ 0 & 1 & 1 & 0 \\ 0 & 1 & 1 & 0 \\ 0 & 0 & 1 & 1 \end{bmatrix} \quad F = \begin{bmatrix} 1 \\ 0 \\ 1 \\ 0 \end{bmatrix} \quad \begin{array}{l} n = 4 \\ \text{Nonreachable states} = 0, 15, 1, 14, 8, 7, 9, 6 \\ \text{Attractors} = 2, 3, 4, 5 \end{array}$$

(b) T matrix, F -Vector and State-Transition Diagram

**Fig. 4. Structure and Behavior of a Four-Cell non-group CA
(also referred to as Multiple Attractor CA (MACA))**

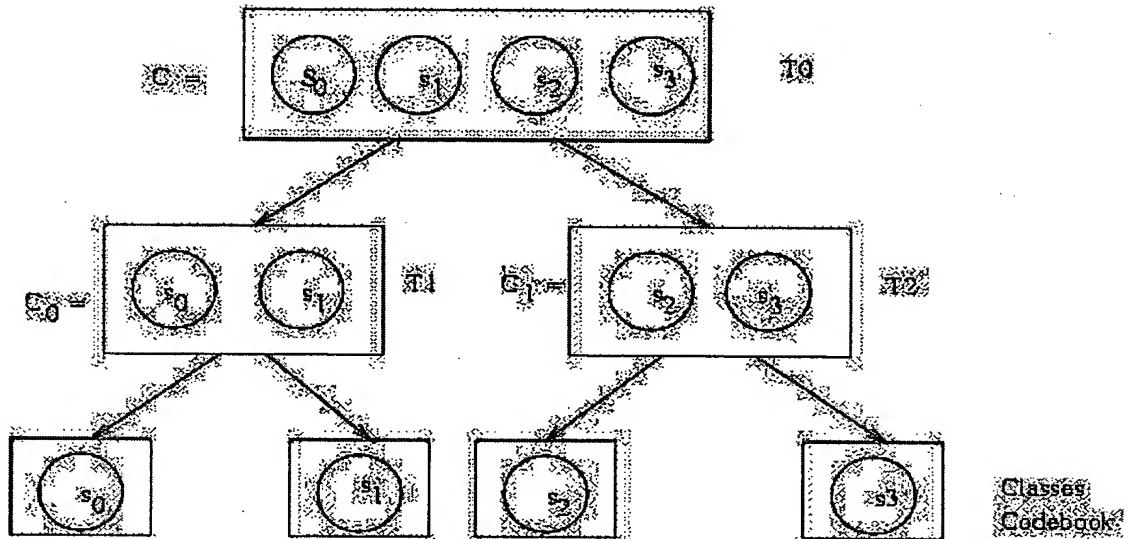


Fig. 5. The logical Structure of multi-class Classifier designed with multi-stage two-class classifiers

Note: (i) Each classifier is a MACA having the states of one subset of attractor basins belonging to one class while that of the other subset covers the elements of the second class.
(ii) The PEF (Pseudo Exhaustive Field) field of attractor is used as the address to access 1 bit Index Memory (36 in Fig 1 (b)) that stores 1 bit (0 or 1) class information of two-class classification.

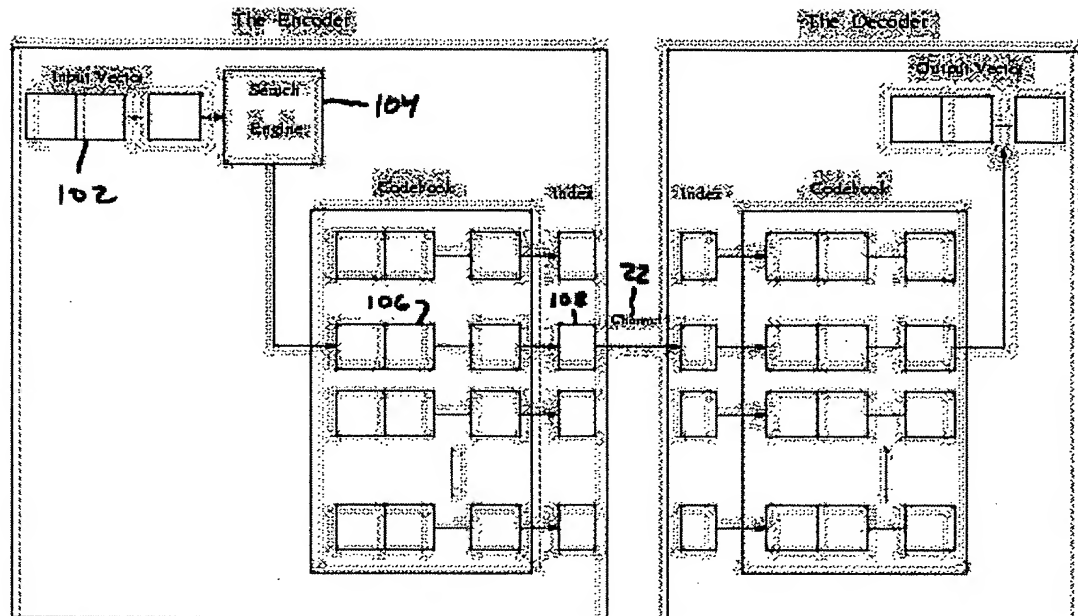


Fig. 6. Encoder and Decoder

